

PRODUCT DATASHEET

CARO NON-COMBUSTIBLE PAVING PEDESTALS

This weather-proof & non-combustible product carries a European Classification (Euroclass) A1 fire rating. Manufactured from galvanised steel, the Firesol non-combustible paving pedestal is suitable for paved terraces, podiums, balconies and flat roof areas.

SUPPORT PLATE FOR PAVING

The FS C3/4T support plate – manufactured in Aluminium, keeps a constant 3mm gap between paving / tiles. Upstands can also be easily clipped for use in stretcher bond format.

THREADED ADJUSTER


Available in four different height variations, the threaded adjuster provides infinite height tuning, so as to achieve the perfect flat surface.

LOCKING BOLT

Hexagonal locking bolt is used for fixing pedestal at desired height and for added stability.

PEDESTAL BASE

100 x 100mm square pedestal base allows ample flat supporting surface to spread the load and protect waterproofing membrane, but small enough to pave up to edges and corners without overhang.

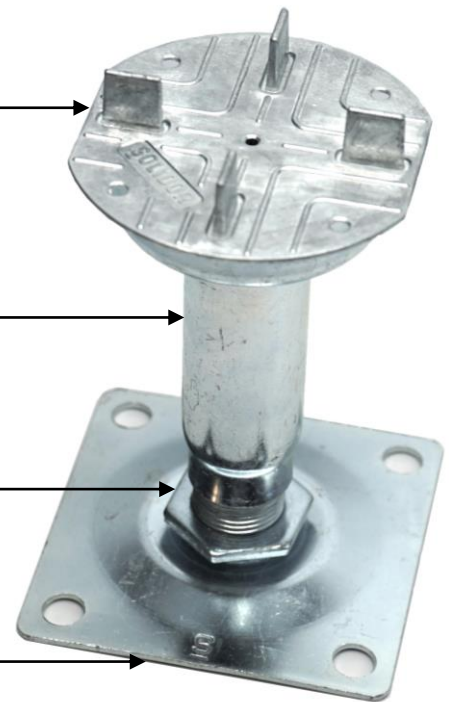

Advantages:

- Non-flammable
- High load capacity
- Modular
- Suitable for wooden as for aluminium carrier

HEIGHT VARIATIONS AVAILABLE

FS 6/8 with FS C3/4T	60-80mm high
FS 7/10 with FS C3/4T	70-100mm high
FS 9/14 with FS C3/4T	90-140mm high
FS 13/22 with FS C3/4T	130-220mm high
Maximum weight loading	1500kg per pedestal
Pedestal Base Diameter	100 x 100mm
Support Plate Diameter	90mm